



RZR Rear Center Console Delete Kit Installation Instructions



Tools Required

T27 Torx Driver Plastic Fastener Pliers or Flat Head Screwdriver
Razor Blade M16 and M19 Wrenches (for RZR's with rear harness')


Step 1: Remove all 4 seats.

Step 2: Remove the 7 torx screws and 8 plastic clips holding in the front and rear center consoles. The front console does not have to be removed but you do need to be able to lift the rear of it. One torx screw on the front end of the front console is not shown. It is optional to remove.

Step 3: Remove the rear center console by lifting the rear up first. You can lift the rear portion of the front console to make it easier. Remember to unhook the cigarette lighter wires. If you have rear harness' that are bolted in you will need to remove the bolts with a M16 and M19 wrenches or sockets. If you have 3 point seat belts the rear center console can slide over them.

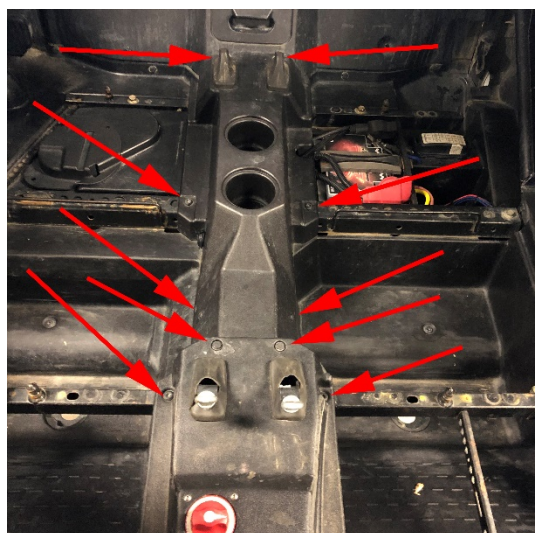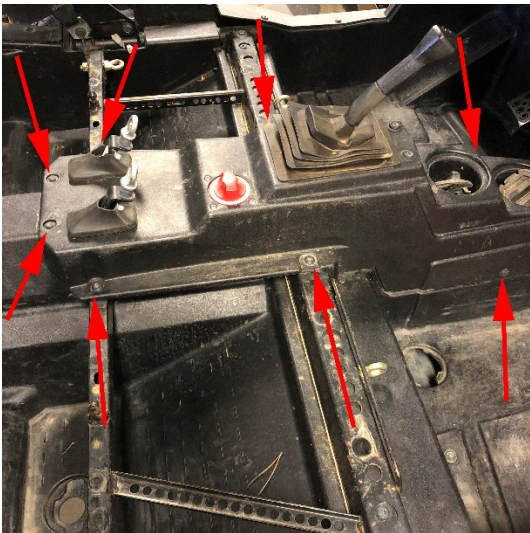

Step 4: Remove the cigarette lighter from the rear center console by pressing on the top and bottom. Install the cigarette lighter into the new console delete plate.

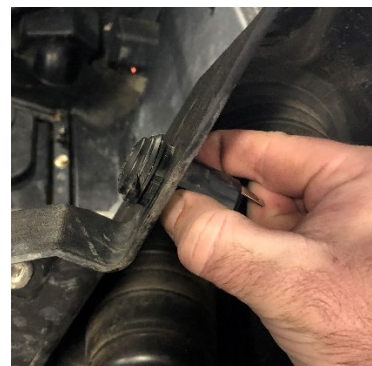



Step 5: Test fit the console delete plate into the RZR by starting with the leading end. Also lift up on the rear portion of the front console. You will need to trim two small triangles of plastic from the front console for it to go all the way down.



Step 6: Once the corners are trimmed enough to fit all the way down you can lift the rear console delete plate and install the cigarette lighter wires. Then put the plate back into position and reinstall the fasteners in the factory positions.



Step 7: Remove the access panel on the rear firewall.



Step 8: Install the rear block off plate by sliding it horizontal from the front then rotating the front bottom edge down. You can reach through the access hole to hold the plate in position while you install the two factory plastic clips. Then reinstall the rear access panel.



Step 9: Reinstall the harness' if removed and the seats. You are finished!